

FDA


MAKROLON[®] FD Sheet is a clear non-UV stabilized polycarbonate sheet which complies with FDA and NSF standard 51 requirements. Close gauge tolerance control combined with high impact strength and heat resistance make MAKROLON FD sheet ideally suited for demanding applications in medical equipment as well as food processing environments. MAKROLON FD has a five (5) year warranty against breakage. The terms of the warranty against breakage are set forth in the warranty, which is available upon request.

Applications

Food processing equipment guards, bulk food bins, candy molds, sneeze guards, single use autoclave packaging, hospital trays, bassinets, incubators and medical device storage containers

Typical Properties			
Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D792	-	1.2
Light Transmission, Clear @ 0.125"	ASTM D1003	%	86
Water Absorption, 24 hrs	ASTM D570	%	0.15
Poisson's Ratio	ASTM E132	-	0.38
MECHANICAL			
Tensile Strength, Ultimate	ASTM D638	psi	9,500
Tensile Strength, Yield	ASTM D638	psi	9,000
Tensile Modulus	ASTM D638	psi	340,000
Elongation	ASTM D638	%	110
Flexural Strength	ASTM D790	psi	13,500
Flexural Modulus	ASTM D790	psi	345,000
Compressive Strength	ASTM D695	psi	12,500
Compressive Modulus	ASTM D695	psi	345,000
Izod Impact Strength, Notched @ 0.125"	ASTM D256	ft-lbs/in	18
Izod Impact Strength, Unnotched @ 0.125"	ASTM D256	ft-lbs/in	60 (no failure)
THERMAL			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C177	BTU-in/hr-ft ² -°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D648	°F	280
Brittleness Temperature	ASTM D746	°F	-200
ELECTRICAL			
Dielectric Constant, @10Hz	ASTM D150	-	2.96
Dielectric Constant @ 60Hz	ASTM D150	-	3.17
Volume Resistivity	ASTM D257	Ohm-cm	8.2 x 10 ¹⁶
Dissipation Factor @ 60 Hz	ASTM D150	-	0.0009
Arc Resistance			
Stainless Steel Strip Electrodes	ASTM D495	Seconds	10-11
Tungsten Electrodes	ASTM D495	Seconds	120
Dielectric Strength, in air @ 0.125"	ASTM D149	V/mil	380

Impact Resistance

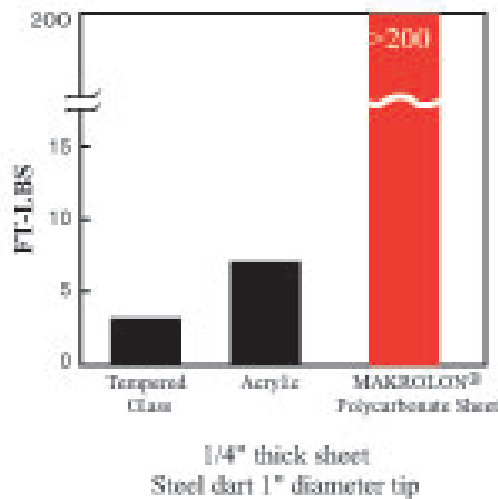

Disclaimer

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.



MAKFD 0209



Standard 51

Sheffield Plastics
A Bayer MaterialScience LLC Business

119 Salisbury Road
Sheffield, MA 01257
800-254-1707

Fax: 800-457-3553

Web site: www.sheffieldplastics.com

E-mail: info@sheffieldplastics.com

©Copyright, Sheffield Plastics Inc., 2008 Printed in USA
MAKROLON[®] is a registered trademark of Bayer AG.